

Size 04 DC

Oil / Air Cooling Unit
2.7804.2.□□ - 75.□□.□□
direct-current fan

Performance

Introduction

Following data are known:

Dissipation loss P_V [kW]
 Oil flow \dot{V}_{Oil} [l/min]
 Max. perm. oil temperature t_{OIE} [°C]
 Cooling air temperature t_{LE} [°C]

From the following can be calculated:



Entry - Temperature - Difference
 $ETD = t_{OIE} - t_{LE}$ [K]
 Specific cooling capacity with ETD = 1 K
 $P_{01} = \frac{P_V}{ETD}$ [kW/K]

In hydraulic systems, the dissipation loss is approximately 20 – 25 % of drive power.

Performance diagrams

Example:
Given: $P_V = 12$ kW; $\dot{V}_{Oil} = 100$ l/min; $t_{OIE} = 70$ °C; $t_{LE} = 30$ °C
 $ETD = 70 - 30 = 40$ K; $P_{01} = \frac{12}{40} = 0,3$ kW/K
Selection: 2.7804.2.11-75.
 $P_{01} = 0,302$ kW/K; $P_V = ETD \cdot 0,302 = 12,1$ kW
 $\Delta t_{O1} = \frac{36 \cdot 12,1}{100} = 4,36$ K; $\Delta t_{L} = \frac{12,1}{0,57} = 21,2$ K

Δt_{O1} = Oil cooling
 Δt_{L} = Air heating
 ΔG_L = Air flow
 $\Delta t_{O1} = \frac{36 \cdot P_V}{\dot{V}_{O1}}$ [K]
 $\Delta t_{L} = \frac{P_V}{G_L}$ [K]

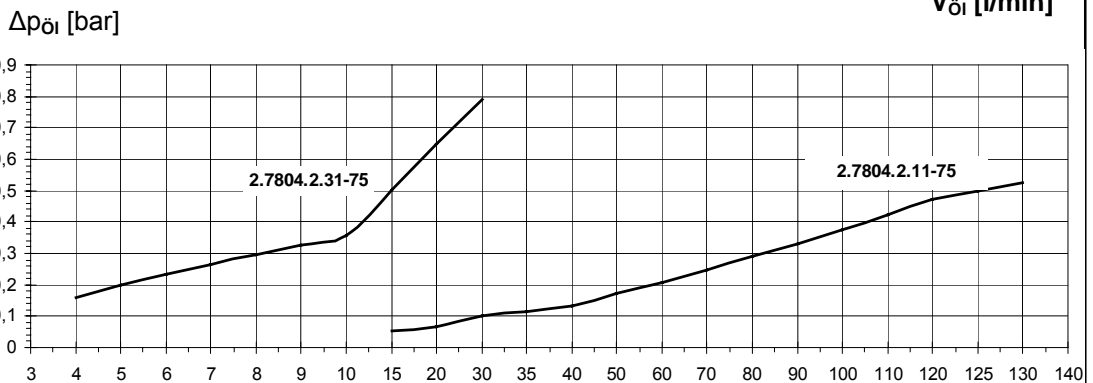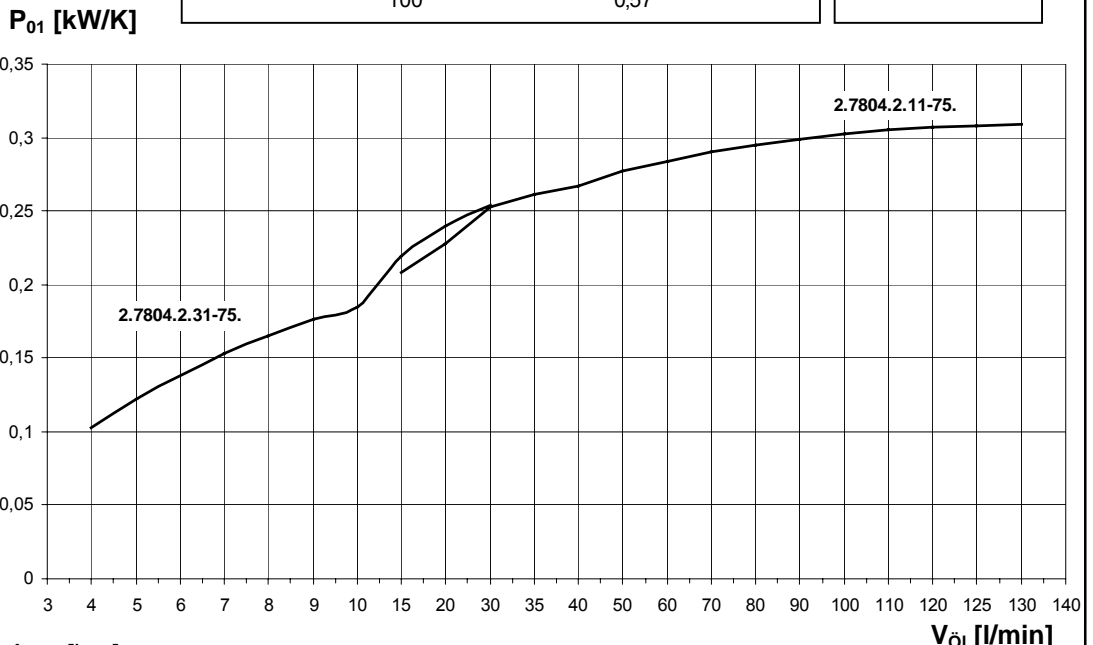

Δ p_{Oil} - Correction

The Δ p-value obtained from the curves applies for $\nu = 32$ mm²/s ($\hat{=}$ 32 cSt).
 For differing viscosities, the Δ p-value has to be multiplied by the factor f.

10	15	20	32	40	50	60	80	100	150	200	250	300	400	500	mm ² /s
0,5	0,65	0,75	1,0	1,2	1,4	1,6	2,1	2,7	4	5,5	7,3	9,5	16	30	f



Echterdinger Straße 111
 D-70794 Filderstadt
 Tel. (0711) 707082-0
 Fax (0711) 707082-19